Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 224240 (02-09-2133-C)

PART NO.	ENG. NO.
02-09-2133	1376-(P913)L
02-09-2134	1376-A(P913)L
02-09-6138	1376-(603)L
02-09-6132	1376-(558)L
02-09-6134	1376-A(558)L

LEGEND

1376-*(****)*

- OPTIONAL DETENT: BLANK=WITH DETENT, A= WITHOUT DETENT
- FORM: L=LOOSE
- P=PREPLATE, BLANK=POSTPLATE
- FINISH CODE

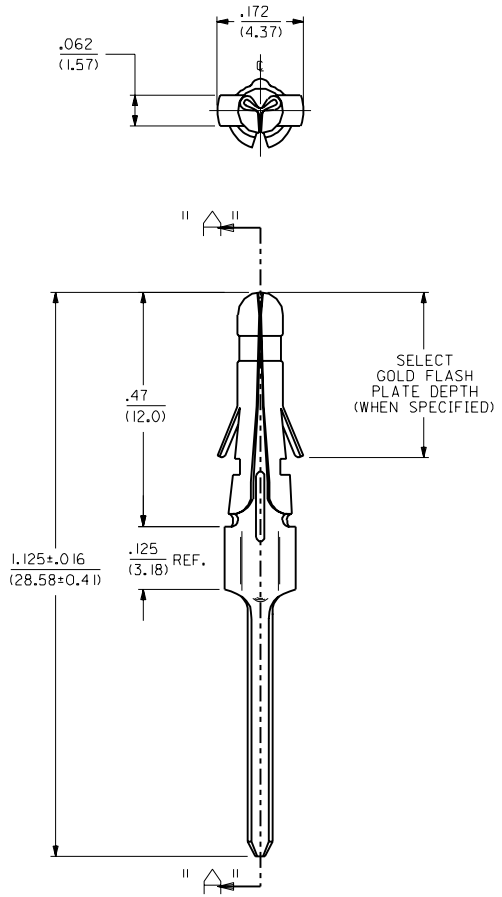

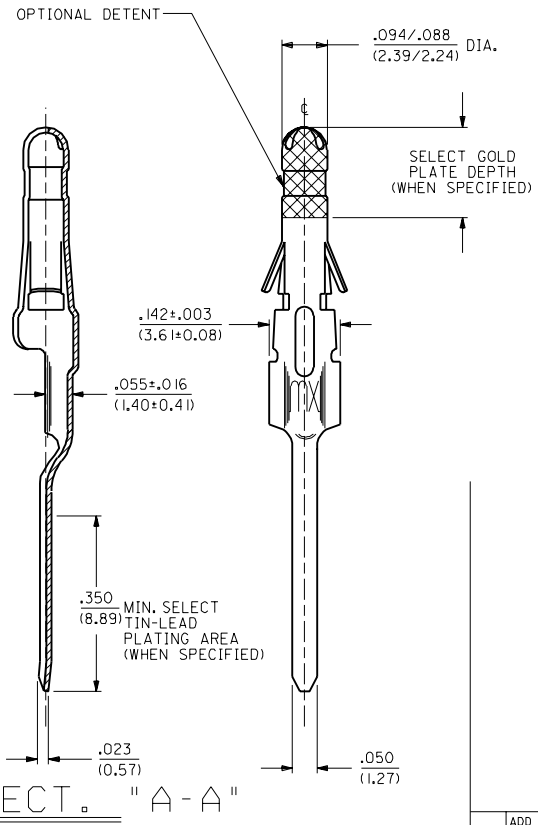

SECT. "A-A"

NOTES:

1. RECOMMENDED P.C. BOARD HOLE SIZE IS .062±.002/(1.57±0.05) DIA.
2. INSERTION FORCE: 3.5 LBS. MAX. WHEN TERMINAL IS INSERTED INTO AN .093 SERIES HOUSING.
3. THIS PART CONFORMS TO PROD. SPEC. 02-09.

FINISH CODES:

913 HOT TIN-LEAD DIP .000100/(0.00254) MIN.

558 SELECT GOLD PLATE .000030/(0.00076) MIN. IN CONTACT AREA, OVER .000050/(0.00127) MIN. NICKEL OVERALL WITH .000010/(0.00025) MAX. GOLD FLASH.

603 SELECT GOLD PLATE .000030/(0.00076) MIN. IN CONTACT AREA, SELECT TIN-LEAD PLATE .000100/(0.00254) MIN. IN TAIL AREA OVER .000050/(0.00127) NICKEL OVERALL WITH SELECT GOLD FLASH .000010/(0.00025) MAX. IN AREA INDICATED.

MATERIAL:
CARTRIDGE BRASS, ALLOY #C26000, .010/(0.25) THICK, SPRING TEMPER

MFG.	SH.	REV.	LTR.	REVISIONS
			L	ADD .125 REF. ECR U2 0809 GK 5/21/92 RW
			K	ADDED NOTE 3. ECR U1 0722 GK 6/11/91 RW
			J	REV'D. & REDRAWN ON CAD. ECR U1 0390 GK 3/13/91 RW

REVISE ONLY ON CAD SYSTEM

DIMENSIONS SHOWN (METRIC) INCH
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°

	INCH	METRIC
3 PLACE	± .010	---
2 PLACE	± .014	± 0.25
1 PLACE	---	± 0.36

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DRWG. BY GK | CHK'D. BY RW | APP'D. BY GWF | SCALE 6 : 1

TITLE: P.C. TAIL TERMINAL MALE, .093/(2.36) DIA.

molex MOLEX INCORPORATED LISLE,ILL. 60532 U.S.A.

SHEET NO. 1 | DATE 2/18/91

PART NO. SEE CHART | DRWG. NO. SD-1376-•

FILE NAME S1376X1.DGN

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIV. CP | SIZE C

1376